Viking 40E Static Jacketed Kettle

Model – Viking 40E (4215340)

FEATURES

- Viking static jacketed kettle with lid
- Electric heated version
- 316 Stainless steel bowl
- Electromechanical controls
- Step-less temperature control
- Electric tilting
- Measuring stick
- Water faucet (cold water)
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories

TECHNICAL DATA

Net Volume	40L
Spare Volume	8 L
Gross Volume	48 L
Dimensions	
Width	1047mm
Height	1039mm
Depth	743mm
Connections	
Water	Cold ø15mm Hot ø10mm
Electrical	Power 9 kW Voltage 400-415V, 3P+N+E 50/60Hz AMP 16A
Total Heat Load	9kW Latent 0.4 kW, Sensible 1.9 kW
Waste	By kitchen contractor
Net Weight	155 kg

NOTE - Mandatory installation kit required for all installations, options are:

Single kettle surface – 4215837
Single kettle subsurface – 4215838
Group kettle surface – 4215845
Group kettle subsurface - 4215846

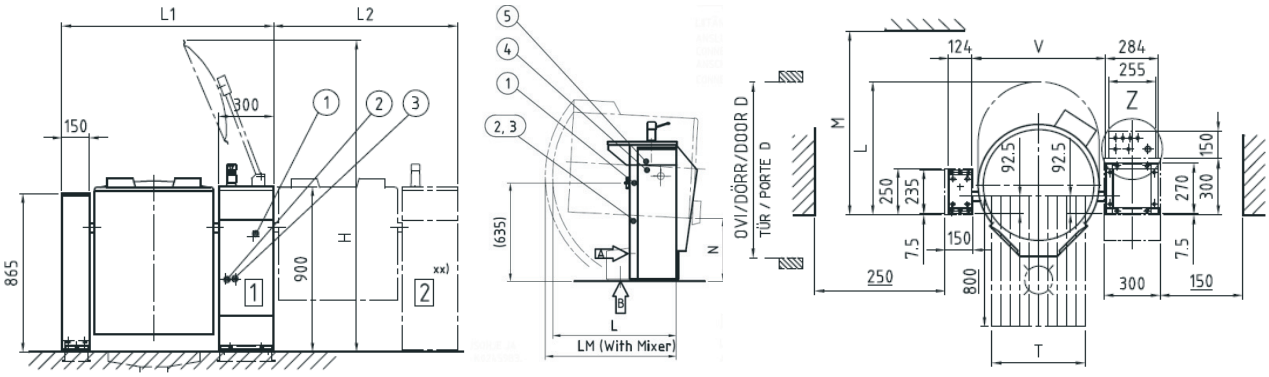

Finland
metos.com/manufacturing

Metos Oy Ab
Ahjonkaarre
FI 04220 Kerava
Finland
Telephone +358 204 3913
international.sales@metos.com

(1) Electrical connection
(2) Cold water connection
(3) Hot water connection
(4) Data cable (HACCP option)
(5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	T mm	D mm	N mm	V mm
40E	1047	897	900	630	730	1710	400	730	455	613

Disclaimer: All unit capacities are based on subjective testing.
In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.

© Copyright Metos Oy Ab

Viking 60E Static Jacketed Kettle

Model – Viking 60E (4215341)

FEATURES

- Viking static jacketed kettle with lid
- Electric heated version
- 316 Stainless steel bowl
- Electromechanical controls
- Step-less temperature control
- Electric tilting
- Measuring stick
- Water faucet (cold water)
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories

TECHNICAL DATA

Net Volume	60L
Spare Volume	8 L
Gross Volume	68 L
Dimensions	
Width	1047mm
Height	1039mm
Depth	743mm
Connections	
Water	Cold ø15mm Hot ø10mm
Electrical	Power 10.5 kW Voltage 400-415V, 3P+N+E 50/60Hz AMP 16A
Total Heat Load	10.5kW Latent 0.6 kW, Sensible 2.6 kW
Waste	By kitchen contractor
Net Weight	165 kg

NOTE - Mandatory installation kit required for all installations, options are:

Single kettle surface – 4215837
Single kettle subsurface – 4215838
Group kettle surface – 4215845
Group kettle subsurface - 4215846

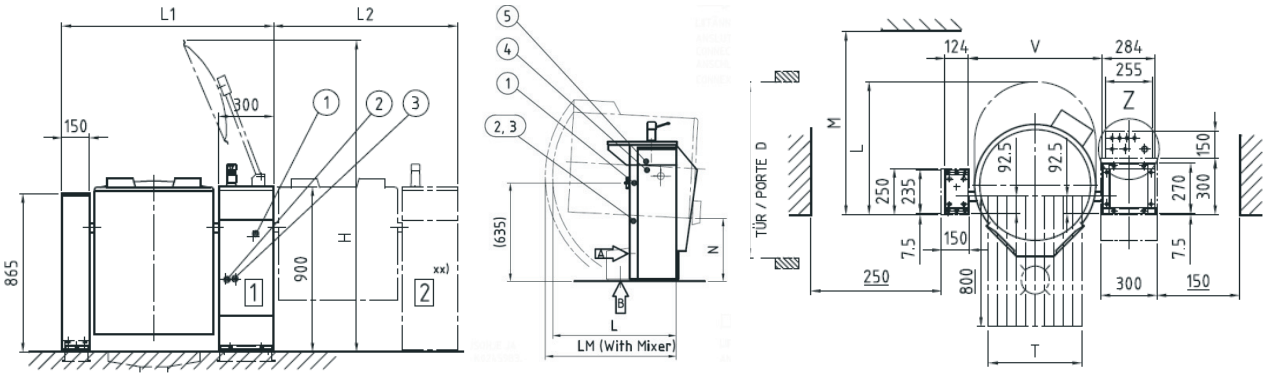

Finland
metos.com/manufacturing

Metos Oy Ab
Ahjonkaarre
FI 04220 Kerava
Finland
Telephone +358 204 3913
international.sales@metos.com

(1) Electrical connection
(2) Cold water connection
(3) Hot water connection
(4) Data cable (HACCP option)
(5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	T mm	D mm	N mm	V mm
60E	1047	897	1040	630	820	1710	400	730	455	613

Disclaimer: All unit capacities are based on subjective testing.
In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.

© Copyright Metos Oy Ab

Viking 80E Static Jacketed Kettle

Model – Viking 80E (4215343)

FEATURES

- Viking static jacketed kettle with lid
- Electric heated version
- 316 Stainless steel bowl
- Electromechanical controls
- Step-less temperature control
- Electric tilting
- Measuring stick
- Water faucet (cold water)
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories

TECHNICAL DATA

Net Volume	80L
Spare Volume	10.5 L
Gross Volume	90.5 L
Dimensions	
Width	1154mm
Height	1039mm
Depth	792mm
Connections	
Water	Cold ø15mm Hot ø10mm
Electrical	Power 12 kW Voltage 400-415V, 3P+N+E 50/60Hz AMP 20A
Total Heat Load	12kW Latent 0.8 kW, Sensible 3.4 kW
Waste	By kitchen contractor
Net Weight	175 kg

NOTE - Mandatory installation kit required for all installations, options are:

Single kettle surface – 4215837
Single kettle subsurface – 4215838
Group kettle surface – 4215845
Group kettle subsurface - 4215846

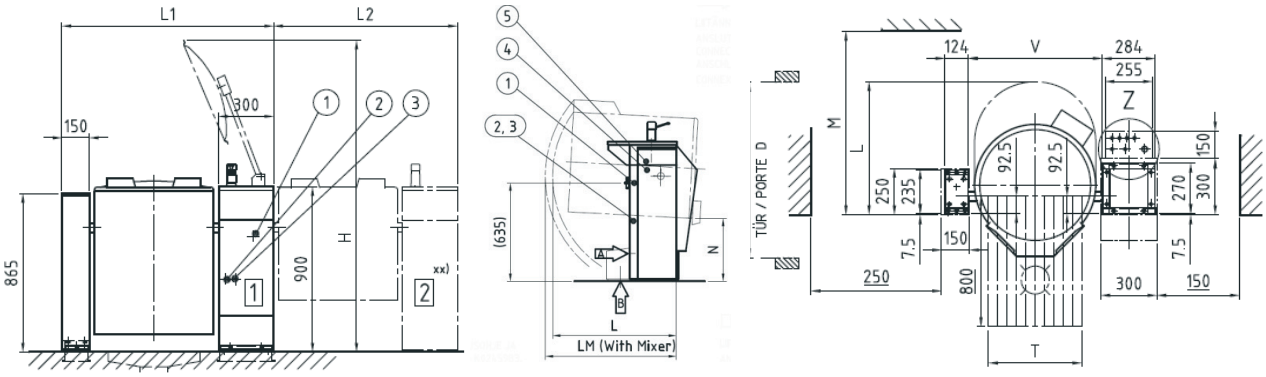

Finland
metos.com/manufacturing

Metos Oy Ab
Ahjonkaarre
FI 04220 Kerava
Finland
Telephone +358 204 3913
international.sales@metos.com

(1) Electrical connection
(2) Cold water connection
(3) Hot water connection
(4) Data cable (HACCP option)
(5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	T mm	D mm	N mm	V mm
80E	1154	1004	1080	710	850	1800	500	785	405	720

Disclaimer: All unit capacities are based on subjective testing.
In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.

© Copyright Metos Oy Ab

Viking 100E Static Jacketed Kettle

Model – Viking 100E (4215344)

FEATURES

- Viking static jacketed kettle with lid
- Electric heated version
- 316 Stainless steel bowl
- Electromechanical controls
- Step-less temperature control
- Electric tilting
- Measuring stick
- Water faucet (cold water)
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories

TECHNICAL DATA

Net Volume	100L
Spare Volume	10.5 L
Gross Volume	110.5 L
Dimensions	
Width	1154mm
Height	1039mm
Depth	792mm
Connections	
Water	Cold ø15mm Hot ø10mm
Electrical	Power 16 kW Voltage 400-415V, 3P+N+E 50/60Hz AMP 25A
Total Heat Load	16kW Latent 0.8 kW, Sensible 3.4 kW
Waste	By kitchen contractor
Net Weight	185 kg

NOTE - Mandatory installation kit required for all installations, options are:

Single kettle surface – 4215837
Single kettle subsurface – 4215838
Group kettle surface – 4215845
Group kettle subsurface - 4215846

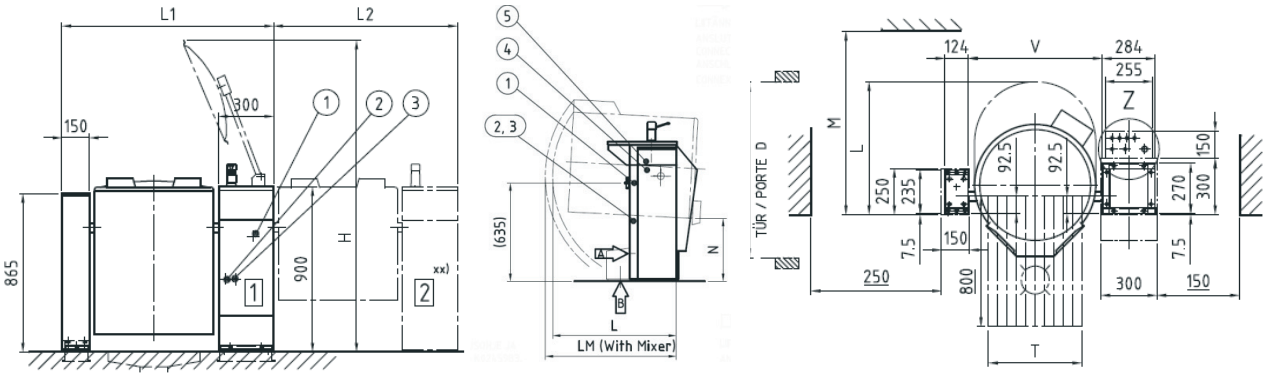

Finland
metos.com/manufacturing

Metos Oy Ab
Ahjonkaarre
FI 04220 Kerava
Finland
Telephone +358 204 3913
international.sales@metos.com

(1) Electrical connection
(2) Cold water connection
(3) Hot water connection
(4) Data cable (HACCP option)
(5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	T mm	D mm	N mm	V mm
100E	1154	1004	1080	710	850	1800	500	785	405	720

Disclaimer: All unit capacities are based on subjective testing.
In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.

© Copyright Metos Oy Ab

Viking 150E Static Jacketed Kettle

Model – Viking 150E (4215345)

FEATURES

- Viking static jacketed kettle with hinged lid
- Electric heated version
- 316 Stainless steel bowl
- Electromechanical controls
- Step-less temperature control
- Electric tilting
- Measuring stick
- Water faucet (cold water)
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories

TECHNICAL DATA

Net Volume	150L
Spare Volume	19 L
Gross Volume	169 L
Dimensions	
Width	1360mm
Height	1039mm
Depth	965mm
Connections	
Water	Cold ø15mm Hot ø10mm
Electrical	Power 20 kW Voltage 400-415V, 3P+N+E 50/60Hz AMP 32A
Total Heat Load	20kW Latent 1.0 kW, Sensible 4.3 kW
Waste	By kitchen contractor
Net Weight	250 kg

NOTE - Mandatory installation kit required for all installations, options are:

Single kettle surface – 4215839
Single kettle subsurface – 4215840
Group kettle surface – 4215843
Group kettle subsurface - 4215844

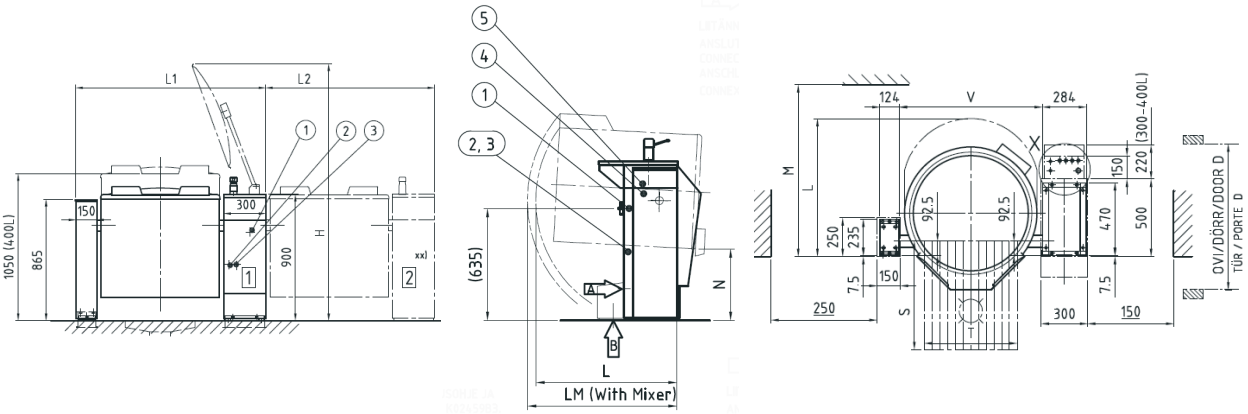

(1) Electrical connection
(2) Cold water connection
(3) Hot water connection
(4) Data cable (HACCP option)
(5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	S mm	T mm	D mm	N mm	V mm
150E	1360	1210	1010	895	910	1980	800	600	945	420	926

Finland
metos.com/manufacturing

Metos Oy Ab
Ahjonkaarre
FI 04220 Kerava
Finland
Telephone +358 204 3913
international.sales@metos.com

Disclaimer: All unit capacities are based on subjective testing.
In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.

© Copyright Metos Oy Ab

Viking 200E Static Jacketed Kettle

Model – Viking 200E (4215346)

FEATURES

- Viking static jacketed kettle with hinged lid
- Electric heated version
- 316 Stainless steel bowl
- Electromechanical controls
- Step-less temperature control
- Electric tilting
- Measuring stick
- Water faucet (cold water)
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories

TECHNICAL DATA

Net Volume	200L
Spare Volume	19 L
Gross Volume	219 L
Dimensions	
Width	1360mm
Height	1039mm
Depth	965mm
Connections	
Water	Cold ø15mm Hot ø10mm
Electrical	Power 30 kW Voltage 400-415V, 3P+N+E 50/60Hz AMP 50A
Total Heat Load	30kW Latent 1.4 kW, Sensible 6.1 kW
Waste	By kitchen contractor
Net Weight	270 kg

NOTE - Mandatory installation kit required for all installations, options are:

Single kettle surface – 4215839
Single kettle subsurface – 4215840
Group kettle surface – 4215843
Group kettle subsurface - 4215844

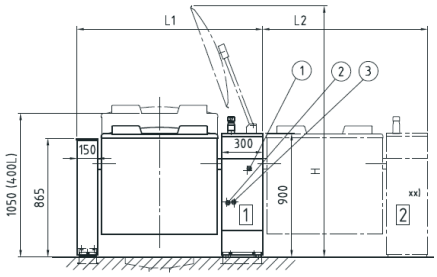

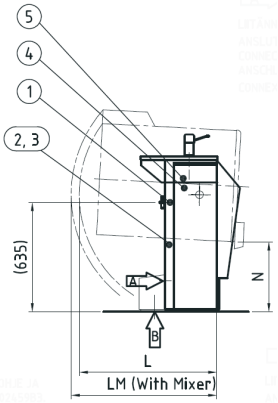

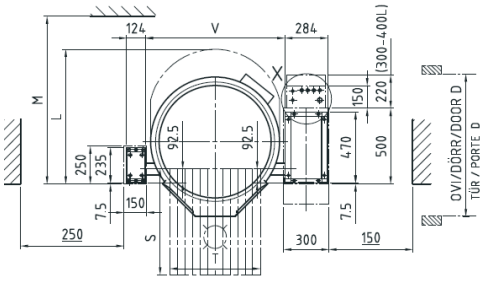

(1) Electrical connection
(2) Cold water connection
(3) Hot water connection
(4) Data cable (HACCP option)
(5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	S mm	T mm	D mm	N mm	V mm
200E	1360	1210	1130	895	980	1980	800	600	945	420	926

Finland
metos.com/manufacturing

Metos Oy Ab
Ahjonkaarre
FI 04220 Kerava
Finland
Telephone +358 204 3913
international.sales@metos.com

Disclaimer: All unit capacities are based on subjective testing.
In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.

© Copyright Metos Oy Ab

Viking 40E Combi Jacketed Kettle

Model – Viking Combi 40E (4215939C)

FEATURES

- Viking kettle with mixer
- Electric heated version
- 316 Stainless steel mixing bowl
- Electromechanical controls
- Safety grid lid (standard)
- Stepless temperature control
- Multi-function mixing tool
- 2 mixing programs
- Electric tilting
- Measuring stick
- Water faucet (cold water)
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories

TECHNICAL DATA

Net Volume	40L
Spare Volume	8 L
Gross Volume	48 L
Dimensions	
Width	1047mm
Height	1039mm
Depth	743mm
Connections	
Water	Cold ø15mm Hot ø10mm
Electrical	Power 9.75 kW Voltage 400-415V, 3P+N+E 50/60Hz AMP 25A
Total Heat Load	9kW Latent 0.4 kW, Sensible 1.9 kW
Waste	By kitchen contractor
Net Weight	155 kg

NOTE - Mandatory installation kit required for all installations, options are:

Single kettle surface – 4215837
Single kettle subsurface – 4215838
Group kettle surface – 4215845
Group kettle subsurface - 4215846

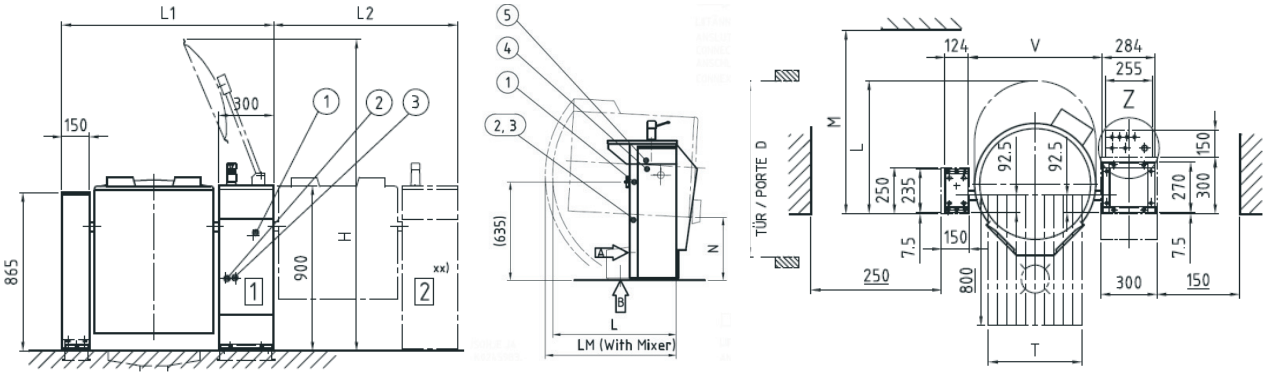

(1) Electrical connection
(2) Cold water connection
(3) Hot water connection
(4) Data cable (HACCP option)
(5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	T mm	D mm	N mm	V mm
40E	1047	897	900	630	730	1710	400	730	455	613

Finland
metos.com/manufacturing

Metos Oy Ab
Ahjonkaarre
FI 04220 Kerava
Finland
Telephone +358 204 3913
international.sales@metos.com

Disclaimer: All unit capacities are based on subjective testing.
In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.

© Copyright Metos Oy Ab

Viking 60E Combi Jacketed Kettle

Model – Viking Combi 60E (4215940C)

FEATURES

- Viking kettle with mixer
- Electric heated version
- 316 Stainless steel mixing bowl
- Electromechanical controls
- Safety grid lid (standard)
- Stepless temperature control
- Multi-function mixing tool
- 2 mixing programs
- Electric tilting
- Measuring stick
- Water faucet (cold water)
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories

TECHNICAL DATA

Net Volume	60L
Spare Volume	8 L
Gross Volume	68 L
Dimensions	
Width	1047mm
Height	1039mm
Depth	743mm
Connections	
Water	Cold ø15mm Hot ø10mm
Electrical	Power 11.25 kW Voltage 400-415V, 3P+N+E 50/60Hz AMP 25A
Total Heat Load	10.5kW Latent 0.6kW, Sensible 2.6 kW
Waste	By kitchen contractor
Net Weight	165 kg

NOTE - Mandatory installation kit required for all installations, options are:

Single kettle surface – 4215837
Single kettle subsurface – 4215838
Group kettle surface – 4215845
Group kettle subsurface - 4215846

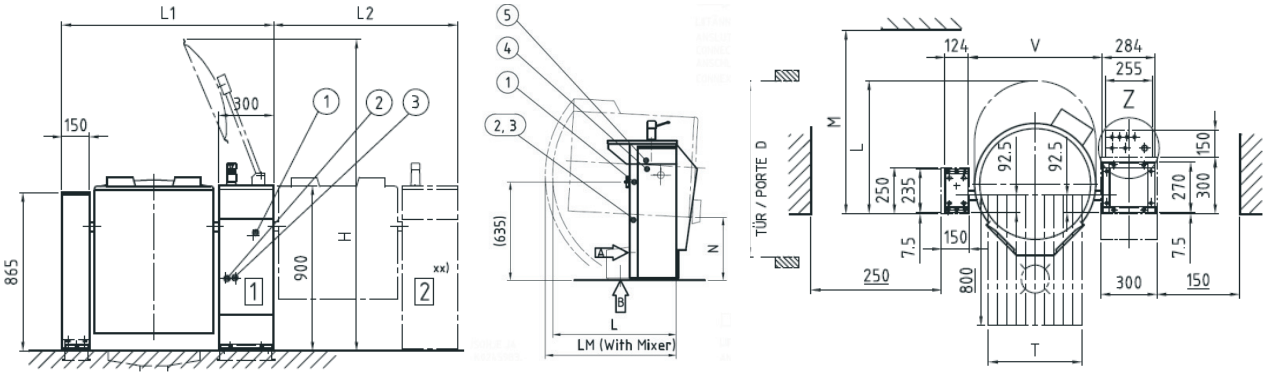

(1) Electrical connection
(2) Cold water connection
(3) Hot water connection
(4) Data cable (HACCP option)
(5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	T mm	D mm	N mm	V mm
60E	1047	897	1040	630	820	1710	400	730	455	613

Finland
metos.com/manufacturing

Metos Oy Ab
Ahjonkaarre
FI 04220 Kerava
Finland
Telephone +358 204 3913
international.sales@metos.com

Disclaimer: All unit capacities are based on subjective testing.
In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.

© Copyright Metos Oy Ab

Viking 80E Combi Jacketed Kettle

Model – Viking Combi 80E (4215941C)

FEATURES

- Viking kettle with mixer
- Electric heated version
- 316 Stainless steel mixing bowl
- Electromechanical controls
- Safety grid lid (standard)
- Stepless temperature control
- Multi-function mixing tool
- 2 mixing programs
- Electric tilting
- Measuring stick
- Water faucet (cold water)
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories

TECHNICAL DATA

Net Volume	80L
Spare Volume	10.5 L
Gross Volume	90.5 L
Dimensions	
Width	1154mm
Height	1039mm
Depth	792mm
Connections	
Water	Cold ø15mm Hot ø10mm
Electrical	Power 12.75 kW Voltage 400-415V, 3P+N+E 50/60Hz AMP 32A
Total Heat Load	12kW Latent 0.8kW, Sensible 3.4 kW
Waste	By kitchen contractor
Nett Weight	175 kg

NOTE - Mandatory installation kit required for all installations, options are:

Single kettle surface – 4215837
Single kettle subsurface – 4215838
Group kettle surface – 4215845
Group kettle subsurface - 4215846

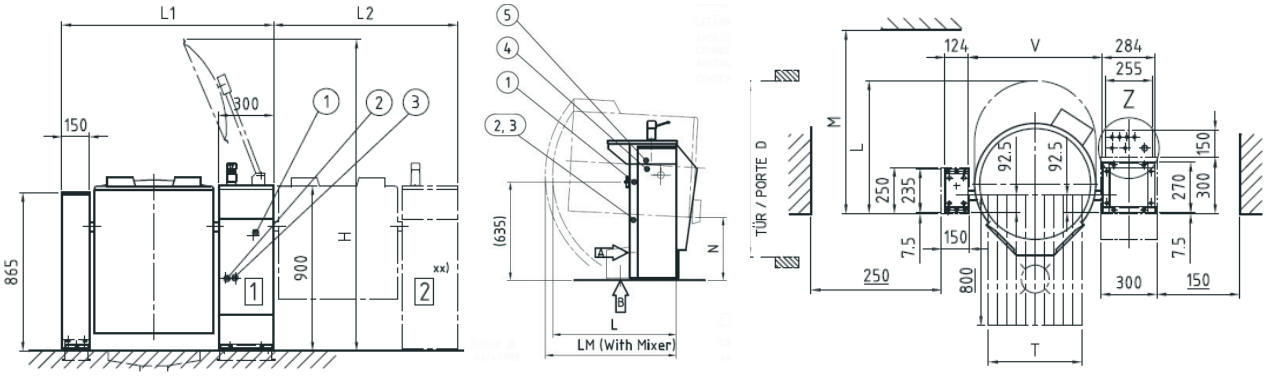

(1) Electrical connection
(2) Cold water connection
(3) Hot water connection
(4) Data cable (HACCP option)
(5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	T mm	D mm	N mm	V mm
80E	1154	1004	1080	710	850	1800	500	785	405	720

Finland
metos.com/manufacturing

Metos Oy Ab
Ahjonkaarre
FI 04220 Kerava
Finland
Telephone +358 204 3913
international.sales@metos.com

Disclaimer: All unit capacities are based on subjective testing.
In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.

© Copyright Metos Oy Ab

Viking 100E Combi Jacketed Kettle

Model – Viking Combi 100E (4215942C)

FEATURES

- Viking kettle with mixer
- Electric heated version
- 316 Stainless steel mixing bowl
- Electromechanical controls
- Safety grid lid (standard)
- Stepless temperature control
- Multi-function mixing tool
- 2 mixing programs
- Electric tilting
- Measuring stick
- Water faucet (cold water)
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories

TECHNICAL DATA

Net Volume	100L
Spare Volume	10.5 L
Gross Volume	110.5 L
Dimensions	
Width	1154mm
Height	1039mm
Depth	792mm
Connections	
Water	Cold ø15mm Hot ø10mm
Electrical	Power 16.75 kW Voltage 400-415V, 3P+N+E 50/60Hz AMP 35A
Total Heat Load	16kW Latent 0.8kW, Sensible 3.4 kW
Waste	By kitchen contractor
Net Weight	185 kg

NOTE - Mandatory installation kit required for all installations, options are:

Single kettle surface – 4215837
Single kettle subsurface – 4215838
Group kettle surface – 4215845
Group kettle subsurface - 4215846

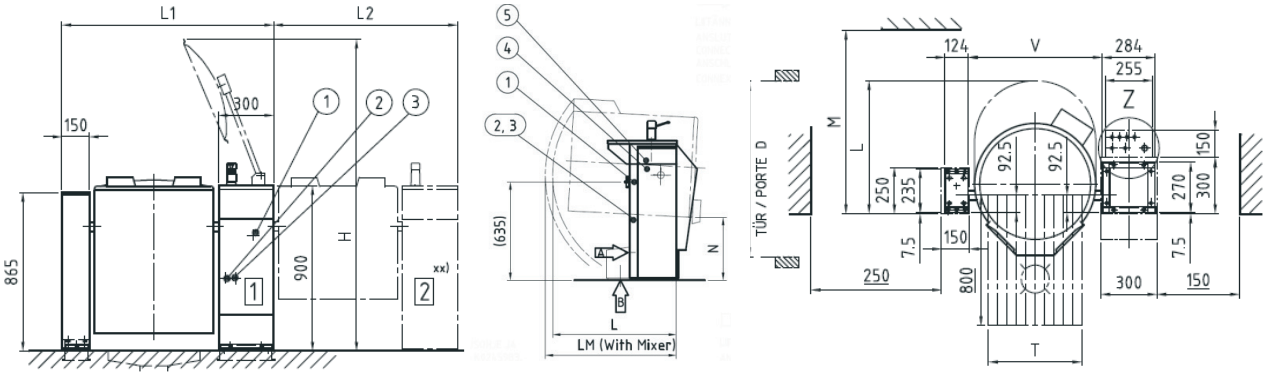

(1) Electrical connection
(2) Cold water connection
(3) Hot water connection
(4) Data cable (HACCP option)
(5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	T mm	D mm	N mm	V mm
100E	1154	1004	1080	710	850	1800	500	785	405	720

Finland
metos.com/manufacturing

Metos Oy Ab
Ahjonkaarre
FI 04220 Kerava
Finland
Telephone +358 204 3913
international.sales@metos.com

Disclaimer: All unit capacities are based on subjective testing.
In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.

© Copyright Metos Oy Ab

Viking 150E Combi Jacketed Kettle

Model – Viking Combi 150E (4215943C)

FEATURES

- Viking kettle with mixer
- Electric heated version
- 316 Stainless steel mixing bowl
- Electromechanical controls
- Safety grid lid (standard)
- Stepless temperature control
- Multi-function mixing tool
- 2 mixing programs
- Electric tilting
- Measuring stick
- Water faucet (cold water)
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories

TECHNICAL DATA

Net Volume	150L
Spare Volume	19 L
Gross Volume	169 L
Dimensions	
Width	1360mm
Height	1039mm
Depth	965mm
Connections	
Water	Cold ø15mm Hot ø15mm
Electrical	Power 21.5 kW Voltage 400-415V, 3P+N+E 50/60Hz AMP 50A
Total Heat Load	20kW Latent 1.0kW, Sensible 4.3 kW
Waste	By kitchen contractor
Net Weight	250 kg

NOTE - Mandatory installation kit required for all installations, options are:

Single kettle surface – 4215839
Single kettle subsurface – 4215840
Group kettle surface – 4215843
Group kettle subsurface - 4215844

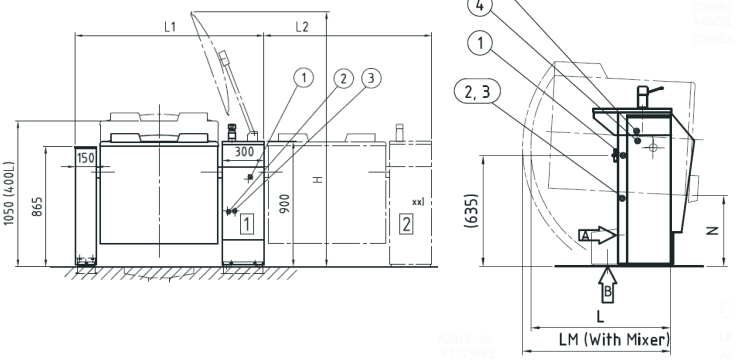

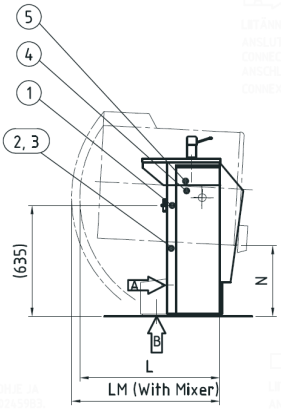

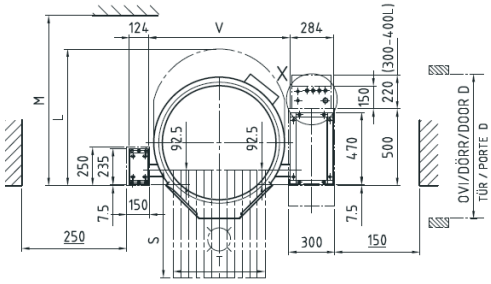

(1) Electrical connection
(2) Cold water connection
(3) Hot water connection
(4) Data cable (HACCP option)
(5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	S mm	T mm	D mm	N mm	V mm
150E	1360	1210	1010	895	910	1980	800	600	945	420	926

Finland
metos.com/manufacturing

Metos Oy Ab
Ahjonkaarre
FI 04220 Kerava
Finland
Telephone +358 204 3913
international.sales@metos.com

Disclaimer: All unit capacities are based on subjective testing.
In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.

© Copyright Metos Oy Ab

Viking 200E Combi Jacketed Kettle

Model – Viking Combi 200E (4215944C)

FEATURES

- Viking kettle with mixer
- Electric heated version
- 316 Stainless steel mixing bowl
- Electromechanical controls
- Safety grid lid (standard)
- Stepless temperature control
- Multi-function mixing tool
- 2 mixing programs
- Electric tilting
- Measuring stick
- Water faucet (cold water)
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories

TECHNICAL DATA

Net Volume	200L
Spare Volume	19 L
Gross Volume	219 L
Dimensions	
Width	1360mm
Height	1039mm
Depth	965mm
Connections	
Water	Cold ø15mm Hot ø10mm
Electrical	Power 31.5 kW Voltage 400-415V, 3P+N+E 50/60Hz AMP 63A
Total Heat Load	30kW Latent 1.4kW, Sensible 6.1 kW
Waste	By kitchen contractor
Net Weight	270 kg

NOTE - Mandatory installation kit required for all installations, options are:

Single kettle surface – 4215839
Single kettle subsurface – 4215840
Group kettle surface – 4215843
Group kettle subsurface - 4215844

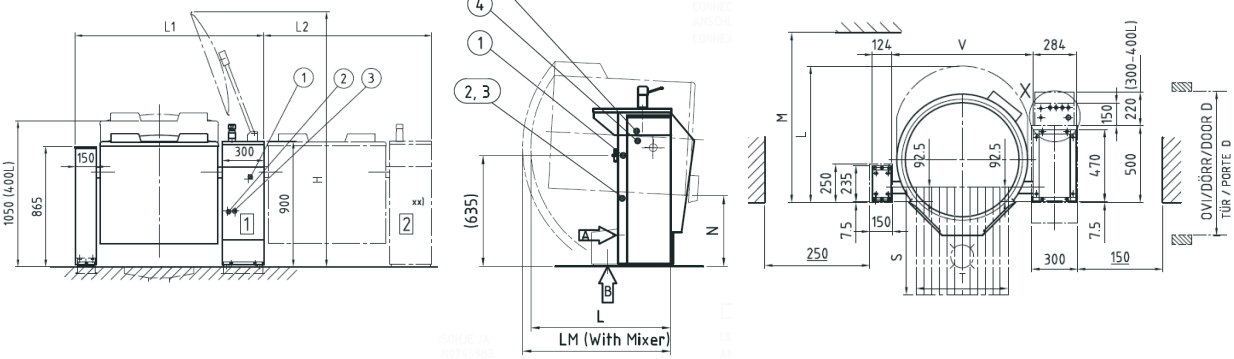

(1) Electrical connection
(2) Cold water connection
(3) Hot water connection
(4) Data cable (HACCP option)
(5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	S mm	T mm	D mm	N mm	V mm
200E	1360	1210	1130	895	980	1980	800	600	945	420	926

Finland
metos.com/manufacturing

Metos Oy Ab
Ahjonkaarre
FI 04220 Kerava
Finland
Telephone +358 204 3913
international.sales@metos.com

Disclaimer: All unit capacities are based on subjective testing.
In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.

© Copyright Metos Oy Ab